Built-in Appliances

2011/2012

BOSCH
Invented for life

Ovens and microwaves. Technique and use.

Safety and comfort

Cool touch front
Quadruple glazing incorporated into the ventilated door design keeps the front door temperature between 40°C -60°C. This saves energy and ensures a safe environment for you and your children in the kitchen.

Child lock
An effective child protection system that prevents unauthorised access to oven and hot plate functions.

Automatic safety switch-off
In the event that the appliance senses no further instructions after a specific time period, it will switch off automatically, this is dependent on the temperature after 30min-10hours.

Design

Automatic programmes
AutoPilot: Simply use the automatic programmes from Bosch and your favourite dishes will be cooked or grilled to perfection. Easy operation: Choose the programme, add the weight of your dish and the preferences. Symbol electronics: Easy to operate due to interactive symbols

XXL oven cavity
The external dimensions of the new ovens are the same but the inner cavity has become XXL in size. There is no other 60 cm wide oven, which offers as much space, with a capacity of up to 65 litres. With 10 % larger baking trays offering space for loads of pastries as well as for a large turkey.

Cleaning

Quick heat (automatic/manual)
The quick start oven heating system will ensure that oven reaches the desired temperature up to 35% faster without consuming more energy, e.g. it takes only 5 minutes to reach 180°C. Once the temperature has been reached, the oven automatically switches to the pre-selected heating method. For manually operated models an acoustic signal resounds to select the heating method.

Eco clean
This world innovation ensures that hard to reach areas are cleaned effectively. The ceramic spherules in the surface allow for a profound increase of grease. Oxygen, bound in the ceramic, breaks down the soiling from all sides when the oven is hot. The oxygen stores are regenerated during normal oven operation. This new system is able to extend the average service life of the appliance. Four times more soiling cycles can be run in comparison to other existing conventional catalytic systems. Selected models come equipped standard with rear wall EcoClean liners. Sidewall liners and ceilings are available as accessories.

Granite enamel
A new attractive lighter grey enamel cavity provides easy cleaning with an extreme scratch and acid resistant surface.

Full glass inner door
The new full glass inner door not only looks elegant but is also easy to clean. When opened you can comfortably place trays or roasters on the door.

Heating methods.

Defrost
The defrosting heating method is perfect for gentle defrosting of frozen food items.

Top/bottom heat
Top/ bottom heat is the classical heating method for all items you want to bake or roast.

hydroBake
hydroBake prevents cakes and pastries from drying out. So it’s ideal for moist cakes, yeast-risen pastries or frozen pastries.

Separate bottom heat
Separated bottom heat allows you to brown cakes and pastries or to heat dishes in a Bain Marie.

3-D hot air
By means of 3-D hot air, cooking cakes and biscuits can be prepared on up to three levels at the same time.

Pizza function
The pizza level combines hot air cooking and bottom heat. This is ideal when preparing frozen food like pizza or French fries without preheating.

Hot air grilling
The hot air grilling system prepares large roasts, such as duckling or goose, with a rotary spit quality. This is done by the grill and fan being switched on and off alternatively (patented interval control mode).

Large surface grill
The large surface grill is ideal when you would like to prepare fish, steaks or toast in the oven. It’s also suited for au gratin dishes.

Small surface grill
When you use the small surface grill only the middle part of the grill-heating element is heated. This is the ideal setting for small amounts, e.g. four slices of toast.

Intensive heat
Intensive heat is ideal for pizza, bread and frozen food because of the unsurpassed strong bottom heat.

Keep warm function
The keep warm function keeps the correct temperature for a longer period of time. Plates and cups are kept at the correct temperature by means of the preheat function.

	HBX53R50	HBL3552	HBB33C550
Product Description	**90CM MULTIFUNCTION OVEN**	**90CM MULTIFUNCTION OVEN**	**MULTIFUNCTION 3D OVEN**
Heating Methods	Top / Bottom Heat, Bottom Heat, Hot Air, Hot Air Grilling, Pizza setting, Large Grill, Small Grill, Defrost	Top / Bottom Heat, Bottom Heat, Top Heat, Hot Air, 3D Hot Air, Hot Air Grilling, Large Surface Grill, Deforst	Top / Bottom Heat, Bottom Heat, 3D Hot Air, Pizza Mode, Hot Air Grilling, Large Grill, Small Grill, Defrost
Comfort and Safety	Oven Capacity: 66 Litres Electronic clock and automatic cooking timer Oven window temperature max. 50°C Temperature control 50°C-250°C	Oven capacity: 66 litres Electronic clock and automatic cooking timer Temperature control between 60°C-250°C Oven window temperature max. 50°C	Oven carriage Oven capacity: 58 Litres Electronic clock and automatic cooking timer Digital display Temperature control 50°C - 270°C Automatic Quick heat (pre-heat 30% faster) Oven window temperature max. 50°C Child lock
Cleaning	Smooth enamelled oven cavity	Smooth enamelled oven cavity	Back wall with catalytic liner Full glass inner door Smooth enamelled oven cavity Fold down grill
Design	Bar Handle	Bar Handle Interior lights	Bar Handle Pop up controls
Accessories	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray	1 x Enamelled Baking Tray 1 x Combination Grid	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray
Product Specs	Overall (H x W x D): 47.4 x 89.4 x 54.5cm Aperture (H x W x D): 46.5 x 86.0 x 55.0cm Capacity: 66 Litres Rating: 3550 W	Overall (H x W x D): 47.4 x 89.4 x 54.5 cm Aperture (H x W x D): 46.0 x 86.0 x 55.0 cm Capacity: 66 litres Rating: 2800 W	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 58L Rating: 3500 W

	HBA38B950	HBL36B650 (left hinged) HBR36B650 (right hinged)	HBA56B550B
	UNIVERSAL PLUS OVEN	**MULTIFUNCTION 3D PLUS OVEN**	**MULTIFUNCTION 3D PLUS OVEN**
	Top / Bottom Heat, hydroBake, 3D Hot Air, Pizza Mode, Bottom Heat, Hot Air Grilling, Large Grill, Small Grill, Defrost, Keep Warm, Intensive Heat, Preheating, Low Temperature cooking	Top / Bottom Heat, Bottom Heat, 3D Hot Air, Pizza Mode, Hot Air Grilling , Large Grill, Small Grill, hydroBake, Defrost, Keep Warm	Top / Bottom Heat, Bottom Heat, 3D Hot Air, Pizza Mode, Hot Air Grilling , Large Grill, Small Grill, hydroBake, Defrost, Keep Warm
	AutoPilot 68 programmes Sabbath function Oven Capacity: 58 Litres Electronic clock and automatic cooking timer Clear Text Display Exact temperature control 30°C -300°C Automatic Quick heat (pre-heat 30% faster) Oven window temperature max. 40°C Child lock Safety switch off	AutoPilot, 40 programmes Sabbath function Oven capacity: 58 Litres Electronic clock and automatic cooking timer Dialogue electronics with symbol display Exact temperature control 30°C - 300°C Automatic Quick heat (pre-heat 30% faster) Oven window temperature max. 40°C Child lock Safety switch off	AutoPilot, 40 programmes Sabbath function Oven capacity: 58 Litres Electronic clock and automatic cooking timer Dialogue electronics with symbol display Exact temperature control 30°C - 300°C Automatic Quick heat (pre-heat 30% faster) Oven window temperature max. 50°C Child lock Safety switch off
	Back wall with EcoClean Panels Full glass inner door Smooth enamelled Oven cavity Fold down grill	Back wall with EcoClean Panels Full glass inner door Smooth enamelled oven cavity Fold down grill	Back wall with Catalytic liner Full glass inner door Smooth enamelled oven cavity
	Pop up controls with illuminated ring **Control panel height 96mm: perfect horizontal design with compact 45 appliances**	Bar Handle Pop up control with illuminated ring	Bar Handle Pop up controls with illuminated ring
	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray
	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 59.0 –59.7 x 56.0 x 55.0cm Capacity: 58L Rating: 3650 W	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 58L Rating: 3650 W	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 58L Rating: 3650 W

	HBA23T550J	HBA23B150E	HBA21B150E
Product Description	**MULTIFUNCTION 3D OVEN**	**MULTIFUNCTION OVEN**	**MULTIFUNCTION OVEN**
Heating Methods	Top / Bottom Heat, Bottom Heat, Hot Air, Hot Air Grilling , Large Grill	Top / Bottom Heat, Bottom Heat, Hot Air, Hot Air Grilling , Large Grill, Small Grill, Defrost	Top / Bottom Heat, Bottom Heat, Hot Air, Hot Air Grilling, Large Grill, Small Grill, Defrost
Comfort and Safety	Oven capacity: 58 Litres Electronic clock and automatic cooking timer Digital display Temperature control 50°C - 270°C Automatic Quick heat (pre-heat 30% faster) Telescopic extension rails Oven window temperature max. 50°C Child lock	Oven capacity: 53 Litres Electronic clock and automatic cooking timer Digital display Temperature control 50°C - 270°C Automatic Quick heat (pre-heat 30% faster) Child lock	Oven capacity: 53 Litres Mechanical Timer Temperature control 50°C - 270°C cleaning
Cleaning	Back wall with Catalytic liner Full glass inner door Smooth enamelled oven cavity Fold down grill	Back wall with Catalytic liner Smooth enamelled oven cavity Fold down grill	Back wall with Catalytic liner Smooth enamelled oven cavity Fold down grill
Design	Bar Handle Pop up controls	Bar Handle	Bar Handle
Accessories	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray	1 x Aluminium Baking Tray 1 x Combination Grid 1 x Universal Tray	1 x Aluminium Baking Tray 1 x Combination Grid 1 x Universal Tray
Product Specs	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 58L Rating: 2850 W	Overall (H x W x D): 59.5 x 59.5 x 51.5cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 53L Rating: 3580 W	Overall (H x W x D): 59.5 x 59.5 x 51.5cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 53L Rating: 2480 W

	HBA11B150
	CONVENTIONAL OVEN
	Top / Bottom Heat, Bottom Heat, Large Grill, Small Grill
	Oven capacity: 57 Litres Mechanical timer Temperature control 50°C - 270°C
	Smooth enamelled oven cavity
	Bar Handle
	1 x Combination Grid 1 x Universal Tray
	Overall (H x W x D): 59.5 x 59.5 x 51.5cm Aperture (H x W x D): 57.5 – 59.7 x 56.0 x 55.0cm Capacity: 57L Rating: 2300 W

Microwave ovens.

	HBC86K753	HMT84G651
Product Description	**STAINLESS STEEL BUILT-IN MICROWAVE OVEN**	**BUILT-IN MICROWAVE WITH GRILL**
Heating Methods	Microwave 900W with 5 power levels (900, 600, 360, 180, 90) Top / Bottom Heat , 3D Hot Air, Bottom Heat, Intensive Heat, Hot Air Grilling, Large Grill, Small Grill, Microcombi, Braising, Pre-warm, Keep Warm function	Microwave with 5 power levels (900, 600, 360, 180, 90) Grill 1200W Combination of grill and microwave power levels 360 / 180 / 90 W
Comfort and Safety	AutoPilot, 70 programmes Oven capacity: 42 Litres 3 stage microwave programming Digital Display with clear text Exact temperature control 30°C - 300°C Quick Heat (pre-heat 30% faster) Inverter Technology, time-/energy saving 6 Memory functions Child lock	Microwave capacity: 25 Litres 3 stage microwave programming Automatic programmes: 4 defrosting programmes, 3 cooking programmes, 8 combi programmes 31.5 cm glass turntable 1 Memory function
Cleaning	Back and top with catalytic liner	–
Design	Pop up controls	Large digital display for displaying cooking times and time of day Push buttons and pop-up rotary control Left-hinged opening door Built-in frame included
Accessories	1 x Insert Grid 1 x Combination Grid 1 x Universal Tray	–
Product Specs	Overall (H x W x D): 45.4 x 59.5 x 53.1cm Aperture (H x W x D): 45.0 x 56.0 x 55.0cm Capacity: 42L Rating: 3600W	Overall (H x W x D): 28.0 x 51.3 x 40.5cm Overall incl. frame (H x W): 38.8 x 59.4cm Aperture (H x W x D): 38.0 x 56.0 x 55.0cm Capacity: 25 litres Rating: 1450W

Coffee machine and warmer drawer.

	HSC140652 (140 cm) HSC290652 (290 cm)	TCC78K750
Product Description	**WARMER DRAWER**	**INTEGRATED FULLY AUTOMATIC ESPRESSO / COFFEE MACHINE**
Comfort and Safety	Complete Telescopic Drawer Stainless Steel Interior Capacity up to 25kg Temperature regulation from about 30° - 80°C (glass surface temperature) Can be used for: Dough proving Thawing of delicate foods Keeping food warm Pre-warming crockery Gentle cooking	Professional, highly convenient preparation of coffee, espresso, cappuccino and tea Innovative brewing technique “aroma pressure system” Innovative heating system “senso flow system” High-value ceramic grinding unit “silent ceram drive” High-value milk nozzle with suction function “cream center” Comfortable quick rinsing of milk system “cream center cleaner” Intelligent “auto valve system” switches automatically between steam and hot water function Pre-brewing function Single portion cleaning Personalised “My Coffee” function “one touch” function for: latte macchiato and cappuccino, milk coffee and personalised “My Coffee” function Water pump pressure 19bar pressure Removable 2.5l water tank Bean container with aroma preservation lid for up to 400g Individually adjustable temperatures for coffee and hot water Display of remaining cups before cleaning or descaling
Product Specs	HSC140652 Overall (H x W x D): 14.1 x 59.4 x 54.4 cm Aperture (H x W x D): 14.1 x 56.0 x 55.0cm Capacity: 25kg Rating: 81 W HSC290652 Overall (H x W x D): 29.0 x 59.4 x 54.4cm Aperture (H x W x D): 29.0 x 56.0 x 55.0cm Capacity: 25kg Rating: 81 W	Overall (H x W x D): 45.4 x 59.4 x 51.5cm Aperture (H x W x D): 45.4 x 59.4 x 53.6cm Rating: 1700W

Under-counter sets.

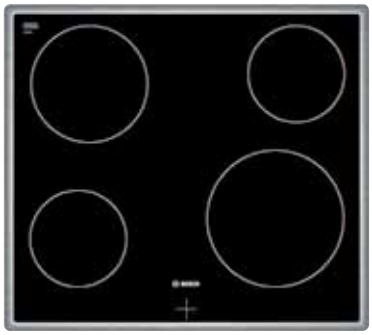

	HEA36B650	NKE645C14
Product Description	**UNDER-COUNTER MULTIFUNCTION PLUS OVEN**	**60CM CERAMIC HOB WITHOUT CONTROLS**
Heating Methods	Top / Bottom Heat, Bottom Heat, 3D Hot Air, Pizza Mode, Hot Air Grilling , Large Grill, Small Grill, Hydro Bake, Defrost, Keep Warm	–
Comfort and Safety	Auto Pilot, 40 programmes Sabbath function Oven Capacity: 58 Litres Electronic clock and automatic cooking timer Digital display with symbol display Exact temperature control 30°C - 300°C Automatic Quick heat (pre-heat 30% faster) Oven window temperature max. 40°C Child lock Safety switch off	4 High Speed Cooking zones 17 Power levels 4 Fold residual heat indicator
Cleaning	Full glass inner door Smooth enamelled oven cavity Fold down Grill	–
Design	Bar Handle Pop up controls with illuminated rings **To be combined with NKE645C14**	Stainless Steel all round trim Decorated HighSpeed ceramic glass (min. Worktop thickness: 20mm) **To be combined with HEA36B650**
Accessories	1 x Enamelled Baking Tray 1 x Combination Grid 1 x Universal Tray	
Product Specs	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 60.0 x 56.0 x 55.0cm Capacity: 58l Rating: 11 600W	Overall (H x W x D): 4.5 x 57.6 x 51.8cm Aperture (H x W x D): 4.1 x 56.0 x 50.0cm Rating: 6400W

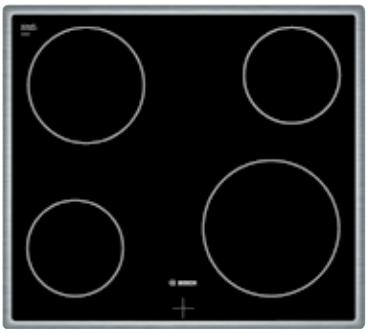

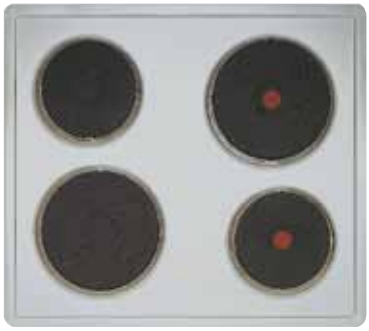

	HEA10B250 (stainless steel) HEA10B260C* (black)	NKE645G14	NCM615A01 (stainless steel) NCM616A01 (black)
Product Description	**UNDER-COUNTER CONVENTIONAL OVEN**	**60CM CERAMIC HOB WITHOUT CONTROLS**	**60CM HOB WITHOUT CONTROLS**
Heating Methods	Top / Bottom Heat, Bottom Heat, Large Grill, Small Grill		
Comfort and Safety	Oven capacity: 58 Litres Temperature control 50°C - 270°C	4 High Speed Cooking zones 4 Fold residual heat indicator	2 speed plates 2 normal plates
Cleaning	Smooth enamelled oven cavity		
Design	Bar Handle **To be combined with NKE..., NCM...**	Stainless Steel all round trim Decorated HighSpeed ceramic glass **To be combined with under-counter oven HEA10B...**	Stainless Steel **NCM615A01 to be combined with HEA10B250** **NCM616A01 to be combined with HEA10B260C**
Accessories	1 x Combination Grid 1 x Universal Tray		
Product Specs	Overall (H x W x D): 59.5 x 59.5 x 54.8cm Aperture (H x W x D): 60.0 x 56.0 x 55.0cm Capacity: 58L Rating: 10 800 W *** HEA10B260C needs 3 phase power**	Overall (H x W x D): 4.5 x 57.6 x 51.5cm Aperture (H x W x D): 4.1 x 56.0 x 50.0cm Rating: 6400 W	Overall (H x W x D): 5.6 x 58.0 x 51.0 cm Aperture (H x W x D): 3.9 x 56.0 x 49.0 cm Rating: 6000 W

Hobs required by the gourmet.

Automatic boil start
On 4 cooking zones, the automatic boil-start function provides automatic switch-over to simmering without loss of energy. Just turn to “A”, and right back to the desired heat setting, and the electronic controls will provide quick heat and automatic ramp-down. No manual adjustment required.

Residual heat indicator
Red lights in a central display field indicate whether the cooking zones are still too hot to be touched. The remaining heat can be used to keep food warm.

Control panel pause
This function locks the control panel (except the main switch) for 20 seconds in the current setting. This enables easy cleaning during cooking process, without modifying the setting.

Touch control with display
On the majority of ceramic hobs – the dual-circuit or roasting zone can be added by the touch of a finger on the touchpad embedded in the ceramic hob. An indicator lamp in the touchpad confirms the activated zone. Being sealed in, the sensor pad is totally impervious to cleaning with water or wiping cloths.

Extendable cooking zone
Fitting individual cooking zones to the saucepans to be used – that’s a flexible and energy-saving approach to cooking, especially when the cooking zone sizes correspond to standard sizes of utensils. Switch-over via sensor touchpad or push-button on the hob.

Switch-selectable oval roasting zone
Ideal, too, for heating oval pans, such as casseroles or fish roasters. Optional selection via sensor pad, push-button.

Timer and memory function
Whether you want to warm up baby’s milk or cook your favourite pasta dish, the memory function stores the individual cooking programmes you require. This mean you can repeat the same cooking procedures, using the same pan, on the same cooking point, as often as you like. Nothing boils over and the plate switches off automatically, thanks to the timer.

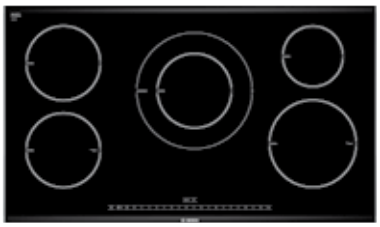



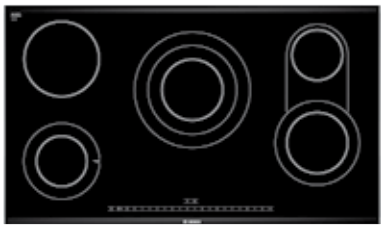

	PIK975N24E	PIA611T16E	PKV975N24D
Product Description	**90CM CERAMIC HOB INDUCTION**	**60CM CERAMIC HOB INDUCTION**	**90CM CERAMIC HOB WTH TOUCH CONTROL**
Comfort and Safety	5 Induction cooking zones 1 dual zone Timer with switch-off function for all zones Digital operation display Electronic regulation 17 power levels Safety switch-off Child lock to prevent unsupervised operation of the appliance 2 stage residual heat indicator per zone	4 Induction cooking zones Touch Control 17 Power levels Timer with switch off function for all zones Child lock Safety switch off	5 High Speed cooking zones, including 1 triple ring 1 dual zone, 1 extendable triple zone Timer with switch-off function for all zones Digital operation display Electronic regulation 17 power levels Safety switch-off Child lock to prevent unsupervised operation of the appliance 2 stage residual heat indicator per zone
Design	DirectSelect control FryingSensor	Frameless	DirectSelect control FryingSensor Accessory: HEZ394301 connecting strip
Product Specs	Overall (H x W x D): 5.6 x 91.6 x 52.7cm Aperture (H x W x D): 5 x 88.0 x 49 – 50 cm Rating: 10800W	Overall (H x W x D): 5.7x 59.2 x 52.2 cm Aperture (H x W x D): 5.1 x 56 x 49.4 - 50 cm Rating: 4600W	Overall (H x W x D): 5.0 x 91.6 x 52.7cm Aperture (H x W x D): 4.4 x 88.0 x 50.0cm Rating: 9450W



	PKC875N14D (WHILE STOCKS LAST)	PRY626B90E	PKN675N14D
Product Description	**80CM CERAMIC HOB WITH DIRECTSELECT**	**60CM CERAMIC / GAS ELECTRIC HOB**	**60CM CERAMIC HOB WITH DIRECTSELECT**
Comfort and Safety	5 High Speed cooking zones, including 1 double ring / elongated zone, 2 double ring zone Timer with switch-off function for all zones Automatic boil start Digital operation display Electronic regulation 17 power levels Safety switch-off Child lock Control panel pause 2 stage residual heat indicator per zone	1 High Speed burner (2.80kW) 1 Standard burner (1.90kW) 1 Economy burner (1.10kW) 1 Electric cooking zone Flame failure device, if the flame cuts out the gas supply stops 1 Hand electric ignition Residual heat indicator **Only natural gas or LPG bottled gas (butane & propane) may be used**	4 High Speed cooking zones, including 1 double ring / elongated zone, 1 double ring zone Timer with switch-off function for all zones Automatic boil start Digital operation display Electronic regulation 17 power levels Safety switch-off Child lock Control panel pause 2 stage residual heat indicator per zone
Design	DirectSelect Facetted design, front and rear Minimum worktop thickness: 20mm	Cast iron pan supports	DirectSelect Facetted design, front and rear Minimum worktop thickness: 20mm
Accessories	HEZ394301 Joining Strip		HEZ394301 Joining Strip
Product Specs	Overall (H x W x D): 5.0 x 81.6 x 52.7cm Aperture (H x W x D): 4.4 x 78.0 x 50.0cm Rating: 7900W	Overall (H x W x D): 4.7 x 60.6 x 52.7cm Aperture (H x W x D): 4.5 x 56.0 x 49.0cm Rating: 1800W	Overall (H x W x D): 5.0 x 60.6 x 52.7cm Aperture (H x W x D): 4.4 x 56.0 x 50.0cm Rating: 7200W





	PKF645E14E	PKE645V14E	NCT615C01
Product Description	**60CM CERAMIC HOB WITH TOUCH CONTROL**	**60CM CERAMIC HOB WITH CONTROLS**	**60CM STAINLESS STEEL HOB WITH CONTROLS**
Comfort and Safety	4 High Speed cooking zones, including 1 double ring zone Digital operation display Electronic regulation 17 power levels Safety switch-off Child lock 2 stage residual heat indicator per zone	4 High Speed cooking zones 9 power levels Residual heat indicators	4 speed plates On/Off LED indicator
Design	Touch control Stainless steel frame	Top controls Stainless steel frame	Stainless steel Hob with side control
Product Specs	Overall (H x W x D): 5.10 x 57.5 x 50.5cm Aperture (H x W x D): 4.7 x 56.0 x 49.0cm Rating: 6600W	Overall (H x W x D): 5.2 x 57.5 x 50.5cm Aperture (H x W x D): 4.8 x 56.0 x 49.0cm Rating: 6600W	Overall (H x W x D): 5.6 x 58.0 x 51.0 cm Aperture (H x W x D): 3.9 x 56.0 x 49.0 cm Rating: 7000 W

	PRS926B90E	PCR915B91E	PCQ715B90Z
Product Description	**90CM CERAMIC GAS HOB**	**90CM GAS HOB**	**70CM GAS HOB WITH WOK BURNER**
Comfort and Safety	5 Gas burner 1 Dual Wok burner 6KW 1 rapid 2.8KW, 2 standard 1.9KW 1 eco burner 1.1KW Flame failure device **Only natural gas or LPG bottled gas (butane & propane) may be used**	5 Gas burner 1Dual Wok burner 5KW 1 rapid 3KW, 2 standard 1.7KW 1 eco burner 1KW Flame failure device **Only natural gas or LPG bottled gas (butane & propane) may be used**	1 Wok burner, 4.0kW 1 High Speed burner, 3.0kW 2 Standard burners, 1.7kW 1 Eco burner, 1.0kW Electronic Ignition via front controls Flame failure device **Only natural gas or LPG bottled gas (butane & propane) may be used**
Design	Cast iron pan supports One hand ignition	Cast iron pan supports One hand ignition	Stainless Steel Cast iron pan supports
Accessories	HZ298105 Simmer Plate	HEZ298105 Simmer plate HEZ298107 Wok ring	–
Product Specs	Overall (H x W x D): 5.7 x 91.6 x 52.7cm Aperture (H x W x D): 4.5 x 85.0 x 49.0cm Rating: 9450W	Overall (H x W x D): 5.3 x 91.5 x 52cm Aperture (H x W x D): 4.5 x 85.0 x 49.0 - 50.0cm Rating: 9450W	Overall (H x W x D): 5.2 x 57.5 x 50.5cm Aperture (H x W x D): 4.8 x 56.0 x 49.0cm

	PCP615B90E	PCP615B80Z
Product Description	**60CM GAS HOB**	**60CM GAS HOB**
Comfort and Safety	1 High speed burner, 3.0kW 2 Standard burners, 1.7kW 1 Eco burner ,1.0kW Electronic ignition via front controls Flame failure device **Only natural gas or LPG bottled gas (butane & propane) may be used**	1 High speed burner, 3.0kW 2 Standard burners, 1.7kW 1 Eco burner ,1.0kW Electronic ignition via front controls Flame failure device **Only natural gas or LPG bottled gas (butane & propane) may be used**
Design	Stainless steel Cast iron pan supports	Stainless Steel Enamelled pan supports
Product Specs	Overall (H x W x D): 5.2 x 58.2 x 52.0cm Aperture (H x W x D): 4.3 x 56.0 x 48.0cm	Overall (H x W x D): 5.2 x 58.2 x 52.0cm Aperture (H x W x D): 4.3 x 56.0 x 48.0cm

	PSB326B21E	PSA326B20E	PKF375V14E
Product Description	**2 BURNER GAS HOB**	**GAS HOB WITH WOK BURNER**	**CERAMIC HOB**
Comfort and Safety	1 High speed burner, 3.0kW 1 Normal burner, 1.7kW Electronic ignition via front controls Flame failure device, if the flame cuts out the gas supply stops Cast iron pan supports **Only natural gas or LPG bottled gas (butane & propane) may be used**	1 Triple circuit burner 3.6kW Electronic ignition via front controls Flame failure device, if the flame cuts out the gas supply stops Cast iron pan supports **Only natural gas or LPG bottled gas (butane & propane) may be used**	2 High speed cooking zone, including 1 Dual zone 9 Power levels 2 Residual heat indicator
Design	Facetted design	Facetted design	Ceramic glass Facetted design
Accessory to Match Vario	HEZ394301 Joining strip	HEZ394301 Joining strip	HEZ394301 Joining strip
Product Specs	Overall (H x W x D): 5.7 x 30.6 x 52.7cm Aperture (H x W x D): 4.5 x 27.0 x 49.0-50.0cm	Overall (H x W x D): 4.7 x 30.6 x 52.7cm Aperture (H x W x D): 4.5 x 27.0 x 49.0-50.0cm	Overall (H x W x D): 4.74x 30.6 x 52.7cm Aperture (H x W x D): 3.8 x 27.0 x 49.0-50.0cm Rating: 3200 W

	PKU375V14E	PKA375V14E	PCX345E
Product Description	**ELECTRIC LAVA GRILL**	**DEEP FAT FRYER**	**STAINLESS STEEL TWO PLATE HOB**
Comfort and Safety	Large cast iron-grid 1 Heating element with different control settings from 1-9 Stainless steel container to be used with lava stones Indicator lamps Drainage plug	Stainless steel container, approximately 3-4 litres Temperature control 100°C-190°C Fat melting stage Cold oil zone 1 Basket Oil draining plug Indicator light	2 quick heat plates 1 indicator for power “ON”
Design	Stainless steel Facetted design	Stainless steel Facetted design	Front controls Stainless steel
Accessory to Match Vario	HEZ394301 Joining strip	HEZ394301 Joining strip	NEZ34VLA connection strip
Product Specs	Overall (H x W x D): 30.6 x 30.6 x 52.7cm Aperture (H x W x D): 23.5 x 27.0 x 49.0 – 50.0cm Rating: 2400 W	Overall (H x W x D): 37.2 x 30.6 x 52.7cm Aperture (H x W x D): 36.6 x 27.0 x 49.0-50.0cm Rating: 2500 W	Overall (H x W x D): 3.76 x 28.8 x 50.5 cm Aperture (W x D): 26.8 x 49.0 cm Rating: 3500 W

	PKC345E	PCH345D	PCD345D
Product Description	**CERAMIC HOB**	**GAS HOB WITH WOK BURNER**	**2 BURNER GAS HOB**
Comfort and Safety	2 high speed cooking zones 2 indicators for residual heat 2 indicators for “ON”	1 burner for pan or wok use (3.6 kW) 1 hand electric ignition Flame failure device, if the flame cuts out the gas supply stops Enamel pan support Control lamp indicating operation **Only natural gas or LPG bottled gas (butane & propane) may be used**	1 high speed burner (3.0 kW) 1 normal burner (1.0 kW) 1 hand electric ignition Flame failure device, if the flame cuts out the gas supply stops Enamel pan support **Only natural gas or LPG bottled gas (butane & propane) may be used**
Design	Front controls	Front control Stainless steel	Front control Stainless steel
Accessory to Match Vario	NEZ34VLA connection strip	NEZ34VLA connection strip	NEZ34VLA connection strip
Product Specs	Overall (H x W x D): 3.76 x 28.8 x 50.5 cm Aperture (W x D): 26.8 x 49.0 cm Rating: 2900 W	Overall (H x W x D): 5.18 x 28.8 x 50.5 cm Aperture (W x D): 26.8 x 49.0 cm	Overall (H x W x D): 5.18 x 28.8 x 50.5 cm Aperture (W x D): 26.8 x 49.0 cm

Bosch extractors.
Fresh air in every kitchen.

Chimney cooker hoods – designed for your kitchen

An absolute “must” in all kitchens, because the cooker hood not only extracts bothersome cooking odours as they occur, but also captures the greasy fumes that would otherwise settle on every surface.

Ducted or recirculated air – whatever is right for your kitchen

With the cooker hoods of the air extraction type, the kitchen air extracted by the fan is ducted to a vent through an outside wall (telescopic wall outlet) or into an air shaft.
In contrast to the exhaust-air principle, which exchanges the air in the kitchen, the recirculating system scrubs the cooking fumes by passing them through grease filters and activated charcoal filters. The clean air is then returned to the kitchen.

Flexible design – a wide range for all requirements

Our range of cooker hoods provides the right solution for every kitchen situation. The contemporary styling of our superb line of chimney hoods, for example, adds that professional touch to any kitchen.
Island extractors form the centre piece of a kitchen. Situated above independently placed worktops.
Chimney extractors are especially designed to be fitted against walls.
Canopy-style cooker hoods are fitted into specially prepared cupboards.

Extraction power

Maximum extraction is measured with a round pipe 15 Ø cm, 1m high x 3m long pipe at a 90° angle. Recirculation generally reduces extraction by 25% due to the more resistant filter system.

Soft light

The dimmer function on our SoftLight appliance means that you can regulate the brightness of your work station – soft light to illuminate you kitchen or direct light onto your hob.

Run-on facility

Just the thing for effective room ventilation. Once activated the function ensures that the ventilation runs on for up to ten minutes after use, before automatically switching itself off.

100 cm

90 cm

90 cm

	DIT109850	DIA096751 (WHILE STOCKS LAST)	DIA09T850
Product Description	**100CM ISLAND EXTRACTOR, EXHAUST OR RECIRCULATION OPERATION**	**90CM ISLAND EXTRACTOR WITH GLASS, EXHAUST OR RECIRCULATION OPERATION**	**90CM ISLAND EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	Electronic control via soft touch buttons 3 Speed settings plus Intensive setting with automatic reset facility Automatic 10 min. run-on facility Twin channel high performance fan motor Rimm ventilation SoftLight and dimmer function Metal grease filter, dishwasher safe	Electronic control via touch controls 3 Speed settings plus Intensive setting with automatic reset facility Automatic 15 min. run on facility Metal grease filter, dishwasher safe	Electronic controls via touch control 3 Speed settings plus intensive setting Automatic 10 minute run-on facility Twin channel high performance fan motor Rim ventiliation Soft light and dimmer function Metal grease filter, dishwasher safe
Design	Stainless steel Softlight and dimmer function Worktop lighting with halogen bulbs (4 x 20 W)	Stainless steel with glass Worktop lighting with halogen bulbs (4 x 20 W)	Stainless Steel with glass canopy Worktop lighting with halogen bulbs (4 x 20 W)
Minimum Clearance Above Cooking Point	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm
Special Accessories	LZ22120 Wall Duct Box 999120 Flex Hose DHZ5285 Recirculation Kit	LZ22120 Wall Duct Box 999120 Flex Hose DHZ5125 Recirculation Kit	LZ22120 Wall duct Box 999120 Flex hose DHZ5365 Recirculation Kit
Product Specs	Height Exhaust (H x W x D): 80.0 –98.0 x 100.0 x 70.0 cm Height Recirc. (H x W x D): 80.0 –110.0 x 100.0 x 70.0 cm Rating: 340 W Intensive. extraction: 820m^3/h Noise level: 45dB	Height Exhaust (H x W x D): 76.0 – 100.0 x 90.0 x 60.0 cm Height Recirc. (H x W x D): 76.0 – 100.0 x 90.0 x 60.0cm Rating: 380 W Normal Extraction: 470 m^3/h Intensive Extraction: 780 m^3/h Noise Level: 50dB/470 m^3/h	Height Exhaust (H x W x D): 74.4 – 92.4 x 90.0 x 68.0cm Height Recirculation (H x W x D): 74.4 – 104.4 x 90.0 x68.0cm Rating: 340W Intensive Extraction: 700m^3/h Noise level: 48dB

90 cm

90 cm

	DWA09E850	DWA09E650
Product Description	**90CM WALL MOUNTED EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**	**90CM WALL MOUNTED EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	Electronic controls via push buttons with digital display 3 Speed settings plus intensive setting with automatic reset facility Automatic 10 minute run-on facility Twin channel high performance fan motor Metal grease filter, dishwasher safe	Electronic controls via push buttons with digital display 3 Speed settings plus intensive setting Twin channel high performance fan motor Metal grease filter, dishwasher safe
Design	Stainless Steel with glass canopy Worktop lighting with halogen bulbs (2 x 20 W)	Stainless Steel with glass canopy Worktop lighting with halogen bulbs (2 x 20 W)
Minimum Clearance Above Cooking Point	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm
Special Accessories	LZ22120 Wall duct Box 999120 Flex hose DHZ5325 Recirculation Kit	LZ22120 Wall duct Box 999120 Flex hose DHZ5325 Recirculation Kit
Product Specs	Height Exhaust (H x W x D): 63.4 – 95.4 x 90.0 x 54.0cm Height Recirculation (H x W x D): 63.4 – 106.4 x 90.0 x54.0cm Rating: 300W Intensive Extraction: 750m^3/h Noise level: 47dB	Height Exhaust (H x W x D): 63.4 – 95.4 x 90.0 x 54.0cm Height Recirculation (H x W x D): 63.4 – 106.4 x 90.0 x54.0cm Rating: 250W Intensive Extraction: 650m^3/h Noise Level: 57dB

90 cm

90 cm

90 cm

	DWK09E851	DWW091451	DWW061451
Product Description	**90CM WALL MOUNTED EXTRACTOR INCLINE DESIGN, EXHAUST OR RECIRCULATION OPERATION**	**90CM WALL MOUNTED EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**	**60CM WALL MOUNTED EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	Electronic controls via push buttons with digital display 3 Speed settings plus intensive setting Twin channel high performance fan motor Metal grease filter, dishwasher safe	3 Speed settings Metal grease filter, dishwasher safe	3 Speed settings Metal grease filter, dishwasher safe
Design	Stainless Steel with glass canopy Worktop lighting with halogen bulbs (2 x 20 W)	Stainless steel Worktop lighting with halogen bulbs (2 x 40 W)	Stainless steel Worktop lighting with halogen bulbs (2 x 40 W)
Minimum Clearance Above Cooking Point	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm
Special Accessories	LZ22120 Wall duct Box 999120 Flex hose DHZ5325 Recirculation Kit	LZ22120 Wall Duct Box 999120 Flex Hose DHZ5145 Recirculation Kit	LZ22120 Wall Duct Box 999120 Flex Hose DHZ5145 Recirculation Kit
Product Specs	Height Exhaust (H x W x D): 86.5 – 115.3 x 90.0 x 44.1cm Height Recirculation (H x W x D): 85.5 – 126.3 x 90.0 x44.1cm Rating: 300W Normal Extraction: 450mm³/h Intensive Extraction: 560mm³/h Noise Level: 57dB	Height Exhaust (H x W x D): (not available at time of print) Height Recirculation (H x W x D): (not available at time of print) Rating: 260W Normal Extraction: 400 m³/h Intensive Extraction: 200 m³/h Noise Level: 67dB/400 m³/h	Height Exhaust (H x W x D): (not available at time of print) Height Recirculation (H x W x D): (not available at time of print) Rating: 260W Normal Extraction: 400 m³/h Intensive Extraction: 200 m³/h Noise Level: 67dB/400 m³/h

90 cm

	DWW061451
Product Description	**60CM WALL MOUNTED EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	3 Speed settings Metal grease filter, dishwasher safe
Design	Stainless steel Worktop lighting with halogen bulbs (2 x 40 W)
	Gas Appliances: 65.0cm Electrical Appliances: 55.0cm
Installation Accessories	LZ22120 Wall Duct Box 999120 Flex Hose DHZ5145 Recirculation Kit
Product Specs	Height Exhaust (H x W x D): (not available at time of print) Height Recirculation (H x W x D): (not available at time of print) Rating: 260W Normal Extraction: 400 m^3/h Intensive Extraction: 200 m^3/h Noise Level: 67dB/400 m^3/h

60 cm

	DHI945F
Product Description	**90CM VISOR EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	3 speed settings, plus intensive setting Saturation level indicator for metal and carbon filter Metal grease filter, dishwasher proof 3 power levels, plus intensive setting
Design	Built under cupboard 90 cm Worktop lighting with halogen lights (2 x 20 Watt)
Installation Accessories	LZ22120 Wall Duct Box 999120 Flex Hose DHZ4505 Recirculation Kit
Product Specs	Unit dimensions: (H x W x D): 47.5 x 89.4 x 27.3 cm Rating: 400 W Maximum extraction: 500 m^3/h

60 cm

	DHI635H
Product Description	**60CM VISOR EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	3 speed settings Metal grease filter, dishwasher proof
Design	Built under cupboard 60 cm Worktop lighting (2 x 60 Watt)
Installation Accessories	LZ22120 Wall Duct Box 999120 Flex Hose DHZ3405 Recirculation Kit
Product Specs	Unit dimensions (H x W x D): 25.0 x 59.8 x 28.0-44.3 cm Rating: 220 W Max. extraction: 400 m^3/h

60 cm

	DHL535C
Product Description	**60CM EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	3 speed settings Metal grease filter, dishwasher proof
Design	Worktop lighting (2 x 40 Watt)
Installation Accessories	LZ22120 Wall Duct Box 999120 Flex Hose DHZ7304 Carbon Filter DHZ7204 Metal Filter
Product Specs	Unit dimensions (H x W x D): 20.2 x 53.0 x 28.0 cm Rating: 270 W Max. extraction: 280 m^3/h

60 cm

	DHU636GZA (Black) DHU635GZA (Stainless Steel)
Product Description	**60CM EXTRACTOR EXHAUST OR RECIRCULATION OPERATION**
Comfort and Safety	3 speed settings Grease filter, adjustable perspex cover
Design	Worktop lighting (1 x 40 Watt)
Installation Accessories	LZ22120 Wall Duct Box 999120 Flex Hose
Product Specs	Unit dimensions (H x W x D): 14.0 x 60.0 x 51.0 cm Rating: 130 W Max. extraction: 300 m^3/h

Bosch refrigeration.

The anti-bacteria fridge lining system from Bosch

The safety shield for your food. Anti-Bacteria is a natural silver-based substance with which the inner walls and door interiors of Bosch fridges is coated. On these surfaces it acts as a permanent barrier to fungi and thus provides a further contribution to your health. Anti-bacteria together with no-frost and multi-air flow means that food stays fresher longer.
The Anti-bacteria lining reduces unpleasant odours and avoids discolouration of the inside of your fridge.
The new refrigeration appliances offer still more user benefits.
On the road to success with new refrigeration appliances: they offer the latest in comfort in conjunction with perfect interior styling.

Significant reduction in energy consumption

Due to their optimised insulation, our new appliances consume particularly small quantities of electricity. For example, we were able to reduce the consumption of our new appliances by approx. 50% when compared to appliances with standard South Africa insulation, benefiting your wallet and our environment. Watch out for A++ ratings.

Freezer compartment ****

You can use the 4-freezer compartment to freeze even larger quantities of fresh foods at guaranteed temperatures of –18°C and lower.

Safety glass shelves

Our superb safety glass shelves have an anti-spillage trim and non-slip surface. They are also scratch-resistant and extremely easy to clean.

Fresh & Cool-drawer

Here storage conditions are above 0°C with humidity of around 90% – ideal conditions for vegetables, herbs and fruits. A special filter to save the humidity of your groceries covers the tray.
This prevents the increase of micro organisms and thus vitamins and mineral nutrients are kept preserved.

Height adjustable shelves

All our fridges are equipped with height-adjustable shelves, giving you the freedom and versatility to maximise the interior space. As an additional convenience, some models also feature a split shelf which can be adjusted to accommodate tall items.

Door open alarm

If you inadvertently leave your freezer door ajar and alarm will sound so as to protect your food from spoilage.

	KIS38A51	KUR15A65
Product Description	**INTEGRATED FRIDGE FREEZER COMBINATION**	**141 LITRE BUILT-UNDER REFRIGERATOR**
Product Features	100% CFC/HFC free Anti Bacteria – permanent barrier against fungi for fresher food Automatic defrosting in refrigerator section, foamed in evaporator plate Electronic temperature regulation SUPER freeze function with automatic switch off Acoustic and visual alarm warning system with memory function Freezing capacity: 12kg in 24hours Storage time in event of failure: 22 hours Door right hinged, reversible	100% CFC/HFC free Soft close door Anti Bacteria – permanent barrier against fungi for fresher foods Automatic defrost Door right hinged, reversible Ventilation in the plinth, no ventilation cut-out in the work surface necessary Variable plinth adaption Height adjustable front feet
Interior Features of Refrigerator Section	25W interior light 5 safety glass shelves, 4 height adjustable, 1 divisible Vegetable Drawer with humidity control Interior with metal applications	3 Safety glass shelves of which 3 are height adjustable 1 Vegetable compartment with lid 3 inner door shelves with dairy compartment Interior with metal applications LED interior light
Interior Features of Freezer Section	3 transparent freezer drawers with freezing calendar	–
Product Specs	Capacity top fridge: 221 litres Capacity bottom freezer: 59 litres net Energy consumption 290kWh pa Overall: (H x W x D): 177.2 x 54.1 x 54.5cm Aperture: (H x W x D): 177.5 x 56.0 x 55.0cm	Rating: 90W Capacity: 141 litres net Energy consumption: 92kWh/pa Overall: (H x W x D): 82.0 x 59.8 x 54.8cm Aperture: (H x W x D): 82.0 x 60.0 x 55.0cm

Matching Pair

	KIF42P60	GIN38P60
Product Description	**320 LITRE BUILT-IN FULL FRIDGE COOLPROFESSIONAL**	**237 LITRE BUILT-IN FULL FREEZER COOLPROFESSIONAL**
Product Features	100% CFC/HFC free Anti-Bacteria –permanent barrier against fungi for fresher food Auto Defrost Electronic temperature control, touch control Acoustic alarm Door right hinged, reversible Complete ventilation through the plinth	100% CFC/HFC free No Frost Freezer Electronic temperature control, touch control Storage time in event of power failure: 11 hours Freezing capacity: 25kg in 24 hours Door left hinged, reversible Complete ventilation through the plinth
Interior Features	Dynamic Cooling SUPER cool function 3 Height adjustable safety glass shelves, of which one is easyLiftshelf 4 full extension storage trays LED interior light	SUPER freeze function with automatic switch off function Acoustic / Visual alarm 2 Hinged freezer compartments with transparent front 5 Freezer drawers, incl. 1 Big Box 6 Security glass shelves between freezer drawers LED illumination
Interior Features of VitaFresh Section	Air Fresh filter Near 0°C Chiller section, 78 litre VitaFresh humidity container (about 95% humidity), 25 litre VitaFresh “dry” container (about 50% humidity) LED interior light	–
Product Specs	Rating 120W Fridge Capacity: 306 litres net Energy Efficiency class: A++ kWh/yr 121 Unit dimensions (H x W x D): 177.2 x 55.6 x 54.5cm Aperture: (H x W x D): 177.5 x 56.0 x 55.0cm	Energy Efficiency class: A++ kWh/yr 222 Rating 120W Fridge Capacity: 213 litres net Unit dimensions: (H x W x D): 177.2 x 55.6 x 54.5cm Aperture: (H x W x D): 177.5 x 56.0 x 55.0cm

(Please note only available on fixed and firm order. Delivery time min. 8 weeks.)

Dishwashing. Economic, easy and perfect with modern technology.

Auto 45°C-65°C
Always the best performance in the most efficient way. The auto program adapts the water consumption, water temperature and cycle time to the soiling level of the dishes. Ideal program for every day use.

Intensive zone
New Intensive Zone option is the solution for mixed loads. Heavily soiled and and delicate dishes are perfectly cleaned in one the same cycle. The entire lower basket is converted into a heavy duty cleaning zone by increasing water pressure and the cleaning temperature in the lower basket, whilst water pressure stays according to the selected program in the upper basket.

Rackmatic
The height of the dishwashers top basket can easily be adjusted by 5cm, even when fully loaded. This means that bulky items such as tall glasses in the top basket or large plates in the bottom one can easily be accommodated without having to re-arrange absolutely everything.

Vario Speed
Top results in half the time. You now have the option of running your preferred washing programme at twice the speed instead of its normal speed simply by pressing a button. The Vario Speed function adapts the temperature and volume of the water used accordingly.

Half load
A reduced dish load can be washed – it's your choice to use the top or bottom basket. Reduction of Energy (up to 15%) and water (up to 25%) consumption.

Aqua-Stop
The Aqua-stop safety system prevents any kind of water damage, no matter whether it occurs at the feed or drain hose or through a leak in the appliance itself.

	SMV65M30EU	SMV40E40EU
Product Description	**FULLY INTEGRATED DISHWASHER 5 TEMPERATURES**	**FULLY INTEGRATED DISHWASHER 3 TEMPERATURES**
Programmes	Intensive 70°C, Auto 45°-65°C, Eco 50°C, Delicate 40°C, Quick Wash 45°C, Pre Rinse Special functions: VarioSpeed, Half Load, Intensive Zone, Sanitation	Normal 65°C, Eco 50°C, Quick Wash 35°C, Pre-Rinse Special function: Half load
Comfort and Safety	Number of standard place settings: 13 ActiveWater hydraulic system Water consumption Auto 45°C-65°C: from 8L , depending on degree of soiling AquaSensor – a light barrier recognises the dirt in the water and continues with less soiled water AquaVario:Automatically adjusts the force of spray to suit the level of soiling Heat Exchanger – for hygienic drying, prevents thermal shock Auto 3 in 1- detergent detection for the best rinsing and wash result 5 spray levels with curved spray arms Electronic time remaining display, low salt and rinse aid indicator Height adjustable top basket with 3 stage RackMatic Fold down racks in top and bottom basket x6 Info light to indicate cycle end Dishwasher cavity: Stainless Steel Aqua Stop with guarantee against flooding	Number of standard place settings: 12 Programme status via LED indicators Electronic low salt and rinse aid via LED indicators Acoustic end of cycle indicator 5 spray levels with curved spray arms Height adjustable top basket with 3 stage RackMatic Dishwasher cavity: stainless steel / polinox AquaStop with guarantee against flooding
Product Specs	Silence: 42dB Consumption rate: Eco 50°C / 10 l / 0.93kWh/175min Rating: 2400W Unit dimensions (H x W x D): 81.5 x 59.8x 55.0cm Aperture: (HxWxD) 81.5 x 60.0 x 55.0 cm	Silence: 52 dB Consumption rate: Eco 50°C / 17l / 1.05kWh Rating: 2300W Unit dimensions (H x W x D): 81.0 x 59.8 x 55.0 cm Aperture: (H x W x D): 81.0 – 87.0 x 60.0 x 55.0 cm

Bosch washer dryer.

If you want a washer and a dryer but you're short of space, this is the perfect solution.
With the non-stop programme, our washer dryer can launder a half load of easy-care fabrics in just 90 minutes. With Bosch you do not have to think about the technology. We have taken care of it so you can be confident that each and every time you use your Bosch washer dryer you will get outstanding performance.
At Bosch our aim is to take the chore out of laundry. We will give you the best results and save you time, so you can get on with the more important things in life.

Special Programmes:

Quick & Mix
This programme is perfect if you do not have a full load of laundry, even if you have a variety of different fabrics.

Wool Care Hand Wash
Wool or delicate articles are treated with the care they deserve. The exceptionally gentle woollens handwash programme runs at only 27 revolutions per minute, with a soft wash action and just the right amount of intervals.

Intensive
If this function is added to the washing programme, the washing time is increased in order to remove tough deep-seated stains.

Reduced Ironing
At the touch of a button you are able to reduce the amount of creases in your washing as the machine spins the laundry at intervals, changing its position several times and at the end of the spin phase producing a gentle rotation action which keeps your laundry free and fluffy saving you time and effort with your ironing.

Fully Electronic Control
Every procedure is monitored and adapted accordingly. From calculating the amount of water required for each wash load and type, to controlling the washing action and spinning for maximum results.

Aqua-Stop
The Aqua-stop safety system prevents any kind of water damage. No matter whether it occurs at the feed or drain hose or through a leak in the appliance itself.

	WKD28540EU
Product Description	**FULLY INTEGRATED ELECTRONIC WASHER DRYER ELECTRONIC WASHER DRYER – 1400RPM**
Programmes	Maximum wash load 6kg Drying load 3kg Non-stop wash and dry program 4kg Large LCD display for program progress indication, temperature, spin speed, remaining time
Washing Machine	Spin Speed 600 – 1400rpm Special Programmes: Night wash, Mixed Load, Super Quick 15min, Wool, Delicates / Silk Automatic load adjustment and foam supression feature 30cm porthole with 95° opening angle Child protection, program and door lock Door hinged left, décor door is reversible AquaStop Fully electronic control dial for all wash - and special programmes
Dryer	Electronic humidity controlled and timed programmes
Product Specs	Capacity: 6kg / 3kg Consumption: 52L / 1.02kWh / 129min Rating: 2300W Unit dimensions (H x W x D): 82.0 x 59.5 x 58.4cm

Technical drawings.



HBL3552



HBX53R50



*20 mm for metal fascias

HBB33C550



* 20 mm for metal fascias

HBA38B950



* 20 mm for metal fascias

HBL36B650/HBR36B650



* 20 mm for metal fascias

HBA56B550B



* 20 mm for metal fascias

HBA23T550J



* 20 mm for metal fascias

HBA23B150E



* 20 mm for metal fascias

HBA21B150E



* 20 mm for metal fascias

HBA11B150



HBC86K753



HMT84G651



HSC140652/HSC290652



An installation height >950 mm makes it difficult to fill the containers for beans and water which are fitted on the top.

TCC78K750



* 20 mm for metal fascias

HEA36B650



NKE645C14



* 20 mm for metal fascias

HEA10B250/HEA10B260C



NKE645G14



* Min. distance from edge of hob to wall
** Maximum

NCM615A01/NCM616A01



PIK975N24E



PIA611T16E



PKV975N24D



PKC875N14D



PRY626B90E



PKN675N14D



PKF645E14E



PKE645V14E



NCT615C01



PCR915B91E



PCQ715B90Z



PCP615B90E



PCP615B80Z



PRS926B90E



PSB326B21E



PSA326B20E



PKF375V14E



PKU375V14E



PKA375V14E



PCH345D



PCD345D



PKC345E



PCX345E



DIT109850



DIA09T850



DWA09E850



DWA09E650



DWK09E851



DWB09W650



DWW091451



DWW061451



DHI945F



DHI635H



DHL535C



DHU636GZA/DHU635GZA



KIS38A51



Space for electrical connection next to the appliance on the left or right-hand side.
Ventilation space in the base.

KUR15A65



KIF42P60



GIN38P60



* Because of height-adjustable screw feet:
when appliance height is 815, base height is 90-160 mm
when appliance height is 875, base height is 150-220 mm

SMV65M30EU



* Because of height-adjustable screw feet:
when appliance height is 815, base height is 90-160 mm
when appliance height is 875, base height is 150-220 mm

SMV40E40EU



WKD28540EU

Green in your environment. Bosch in your kitchen.

Green Technology inside

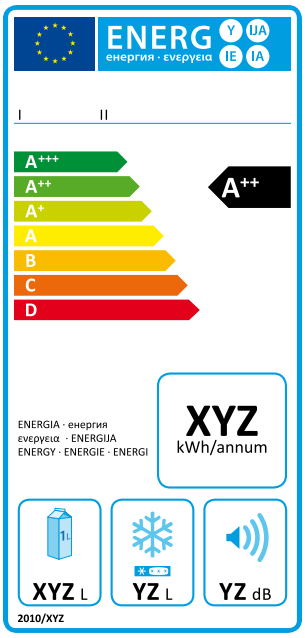

Energy efficiency ratings

At Bosch our aim is to not only provide you with reliable, high quality products that make your life easier, but to also protect and promote a sustainable environment for future generations. This means that every time we design a new product our ideas are based on ecological principles, to ensure that we make the most economic use of natural resources, and avoid pollution of the air, soil and water.
Energy efficiency ratings Energy efficiency labels are informative labels affiliated to manufactured products. These labels are able to indicate a products energy performance in order to provide consumers with the necessary data for making informed purchase decisions. The more efficient a product is the less energy it requires and the more you get for your money. Not only is this saving of electricity good for your wallet, but it is good for the environment too; between 1995 and 2000 there has been a saving of three-quarter million-tons of CO2 alone in Europe, by improving the technique of large household appliances. The energy label ranks the appliance's efficiency from "A+++" to "D".
These are categorised as follows:

Class A+++ – A+	excellent
Class A – B	good
Class C – D	average

Bosch is proud to announce that not one of its integrated appliances have a rating lower than "C" with over 80% of the appliances having a rating of B or higher.

Fridges and freezers energy labelling

Fridges and freezers are the most hardworking appliances in your kitchen as they are on the go 24 hours a day, seven days a week. The energy label is able to provide information about their performance and physical characteristics. These include the annual consumption of energy (in kWh p/a) as well as the storage volume of the compartments (in Litres). All Bosch cooling appliances, even the entry level models have very efficient energy ratings.
It is important to note that the energy label supplies you with the net volume as opposed to the gross volume of the unit. This is the usable volume of the fridge as opposed to the overall volume, and can therefore be relatively important when making a decision as to which unit is best for you. Bosch cooling products have been converted to CFC and HFC free materials in 1993 already. This means that the harmful substances previously used in the insulation materials have been replaced with environmentally friendly natural gases which do not damage the ozone layer or increase the harmful greenhouse effect.

Dishwashers energy labelling

The energy label for dishwashers has gradually been introduced to the whole of Europe since 1999.The aim of this is to reduce energy consumption, while at the same time not having any adverse effect on the cleaning and drying performance of the appliance. Dishwashers, in general, use the Eco50°C programme as its standard programme upon which energy consumption is rated. The energy label for dishwashers comprises 3 classifications namely:

- Energy efficiency
- Cleaning performance
- Drying performance

The values are determined according to the re-formulated norm EN50242.

Washing machines energy labelling

The aim of the energy efficiency label is to offer consumers a standardised method of choosing the most energy efficient appliance, while at the same time offering you the best possible washing results.
Washing machines use the Cotton 60°C program as its standard program upon which energy efficiency, washing performance and spin-drying performance levels are rated. The energy label for washing machines compromises 3 classifications (ranging from "A" to "G" rating) namely:

- Energy efficiency
- Washing performance
- Spin-drying performance

The values are determined according to the reformulated norm EN60456.

Tumble dryers energy labelling

There is a difference between condensation and vented dryers, with condensation dryers having a lower energy efficiency than vented dryers.

The Bosch 5 year guarantee.

5 YEAR GUARANTEE
BUILT-IN APPLIANCES
BOSCH
Invented for life

The world around us has become a myriad of change and confusion.
We are constantly being cluttered with contradictions and complications that we somehow have to sort through on a daily basis. Certain traits have however managed to stand out above the rest and rise out from the clutter.

Quality and style happen to be two of these most sought after traits in today's society. Traits that are truly worth searching for, worth waiting for, and unfortunately far too rare in a world that all to often manages to confuse what is really important to us in our daily lives.

It is this often-illusive search for true quality and style that leads us to something special. The Bosch 3 Year Guarantee is truly something special. The name Bosch epitomises true quality and guarantees that you can move into the future with style and confidence.

TOPS 0861 10 22 10 / JB10586

Bosch Domestic Appliances

Midrand
Private Bag X36
Randjespark
Halfway House 1685
Rep. of South Africa

Visitors:
Fifteenth Road
Randjespark
Midrand

Tel: (011) 265-7800
Fax: (011) 265-7817

Cape Town
Bosch Domestic Appliances
Post Net Suite #248
Private Bag X19,
Milnerton 7435
Rep. of South Africa

Visitors:
Shop No. 1, Marconi Centre
460 Koeberg Road,
Milnerton 7441

Tel: (021) 550-9900
Fax: (021) 552-9205/6

BSH Service Centre
Tel: 0860 026 724
Fax: 0861 171 780
E-mail: applianceserviceza@bshg.com
E-mail: callcentre@anvilconsult.co.za

Spare Parts
Tel: (011) 265-7853
Fax: (011) 265-7850

www.boschappliances.co.za

Please note that certain features apply to particular product. Bosch appliances are guaranteed for 3 years from date of purchase against faulty workmanship and/or material. No responsibility is accepted for printing errors. E&OE.